


# Endura

High quality dispenser for commercial applications.

- ✓ Reliable and durable
- ✓ Flexible and adaptable
- ✓ Great value for money



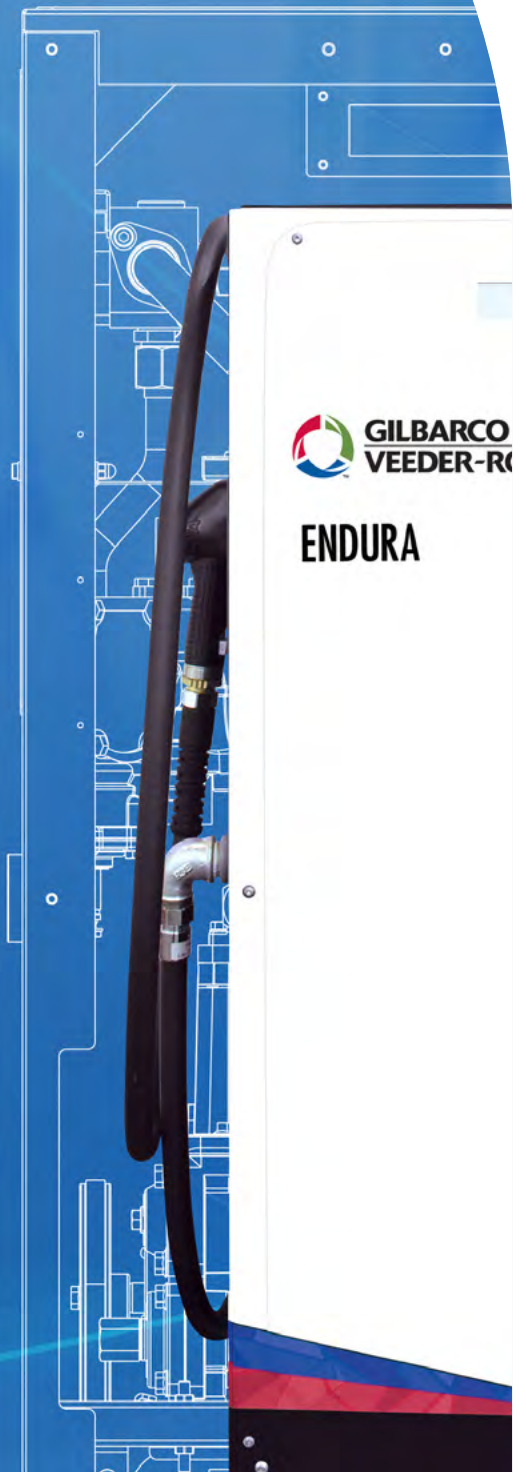

## Reliable and durable

- Robust and reliable enabling usage in commercial and industrial environments
- Designed and manufactured in Germany
- Best in class hydraulics and electronic components
- Powder coated steel or stainless steel finish

## Flexible and adaptable

- Offers different flow rates
- One or two hose options
- MID and non-MID versions
- Can be operated as a stand-alone pump or integrated with most Fleet Management Systems
- Fleet Management System compatibility using Pulse output (Multiwire) or Gilbarco Veeder-Root – 2 wire




## Why Endura?

- ✓ One grade with one or two hoses (one fuelling position)
- ✓ Island oriented
- ✓ Volume (litres) counter
- ✓ Single/double sided 5 digit backlit display
- ✓ Non-ATEX, non-MID (for Diesel and Biodiesel only)
- ✓ Flow Rate: 40 lpm (70, 120, 40/120 lpm optional)
- ✓ Powder coated sheet metal
- ✓ Elaflex hanging hardware (compatible with other standard hanging hardware)
- ✓ Hose reach of 3.5m

## Great value for money

- High quality, proven components
- Robust and reliable
- Minimal maintenance
- Low total cost of ownership
- One step electronic calibration

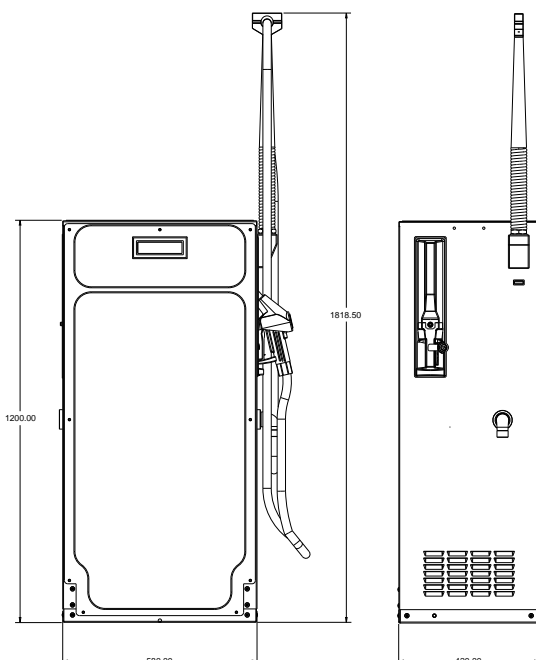

## Options

- > Electromechanical Totaliser
- > Stainless steel panels
- > Additional hose length
- > Enhanced corrosion protection
- > FMS pre-set feature
- > Safety breakaway coupling
- > Hose mast
- > Adapter plate on top for mechanical mounting of Fleet Management System
- > MID Version
- > ATEX version
- > Non-standard colours and livery options
- > ER3 Protocol
- > Nozzle Locks
- > Optional heater for below -20°C

## Technical Specifications

Gilbarco Veeder-Root Commercial Electronic Calculator (MID compliant)

Electrical specs:

230/400V AC, 3-phase

230V AC, 1-phase

50 Hz, +/- 2%

Communication protocols: Gilbarco Veeder-Root 2-Wire and Multiwire (Pulse) output

25mm displays with 15 minute battery back up after power fail

-20°C to 55°C (up to -40°C optional)

## Fuelling the future, today.

Our experience and expertise in the fuelling industry means we understand a forecourt's business and consumer needs better than anybody. Gilbarco Veeder-Root stands for quality, innovation and seamless integration.

To find out more about how you could grow your business with our industry leading dispensing solutions, speak to your relationship manager or visit [www.gilbarco.com/eu](http://www.gilbarco.com/eu)



Email: [euenquiries@gilbarco.com](mailto:euenquiries@gilbarco.com)

