

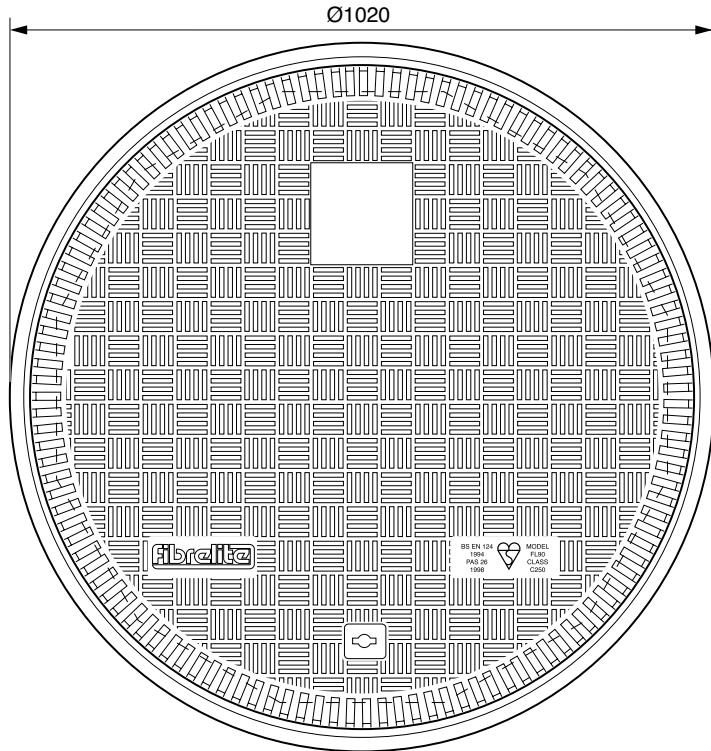



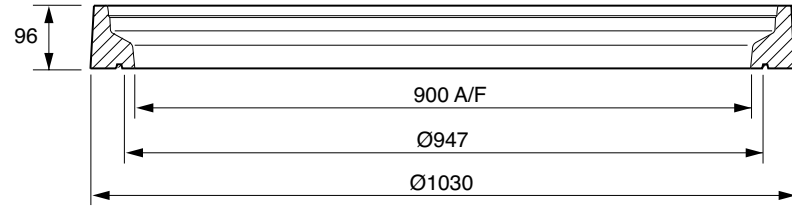

900mm diameter flat sealed composite cover with a composite frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

**FIBRELITE**   
PART OF OPW A DOVER COMPANY

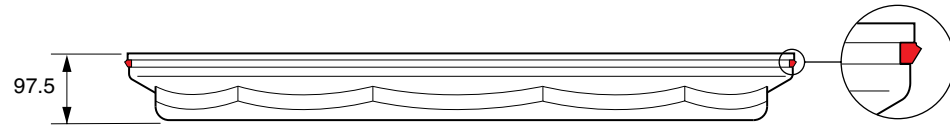

Load Rating	Cover Weight	Frame Weight
B125	21 kg	9.5 kg
TCR	31.5 kg	9.5 kg
C250*	31.5 kg	9.5 kg
D400	48 kg	9.5 kg
F900	88 kg	9.5 kg

\* Awarded British Standard Kite Mark

900mm diameter flat sealed composite cover with a composite frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



**CONCRETE**

**VERY IMPORTANT**


OUTER EDGE "A" OF FRAME SET 5MM ABOVE GENERAL FORECOURT AREA WITH CONCRETE RAMPED AWAY OVER 300MM

**VERY IMPORTANT**

The underside of the frame must be adequately supported by concrete.

Expansion joint filled with petrol resistant mastic.


Minimum 200mm  
Maximum 350mm

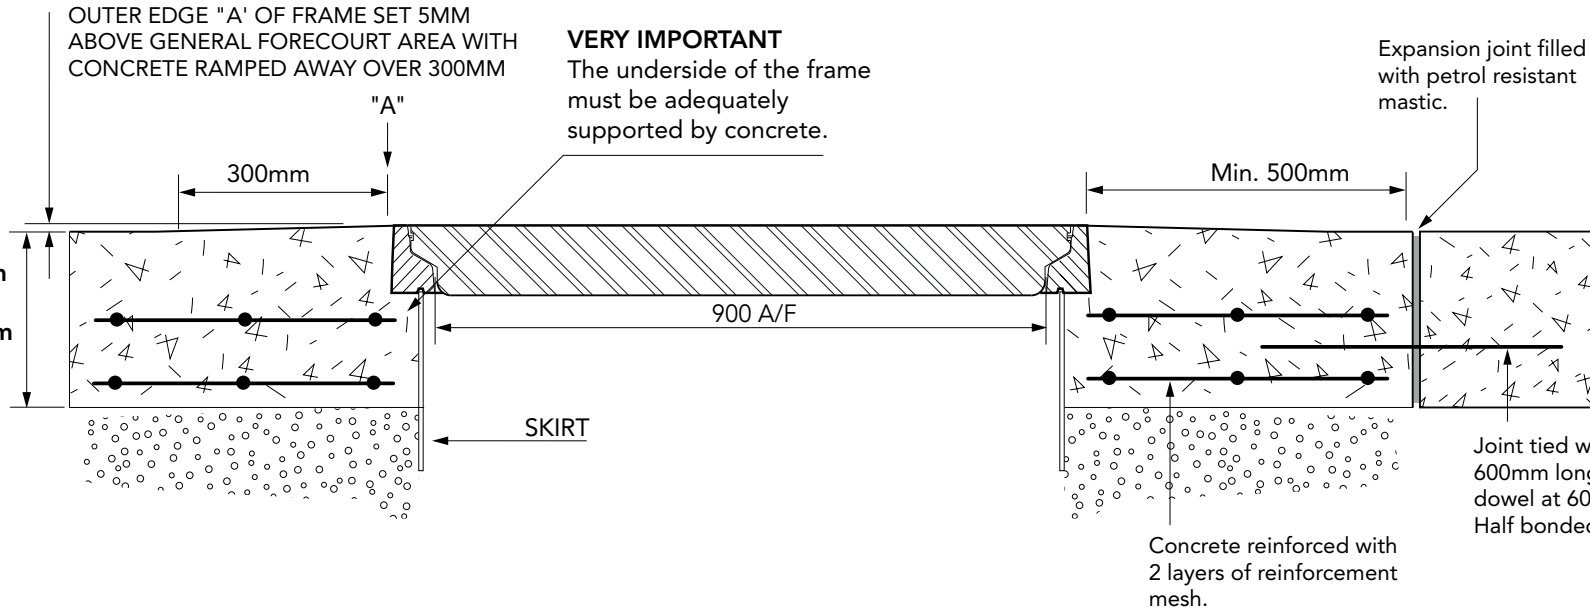

**TARMACADAM**



TARMACADAM (THICKNESS AS SPECIFIED)

Minimum 200mm  
Maximum 350mm

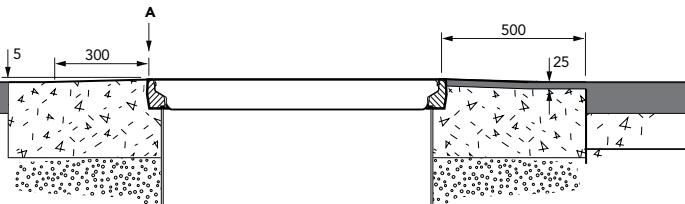

**SETTS**

Minimum 200mm  
Maximum 350mm

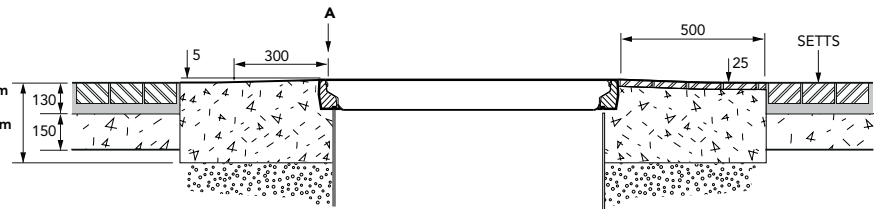

900mm diameter flat sealed composite cover with a composite frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

