
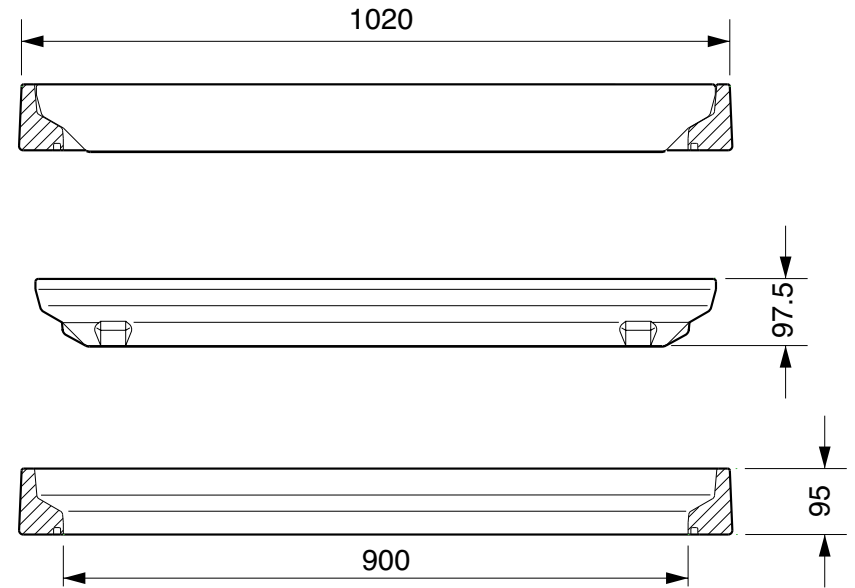


900mm square flat sealed composite cover with an aluminum frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

**FIBRELITE**   
PART OF OPW A DOVER COMPANY

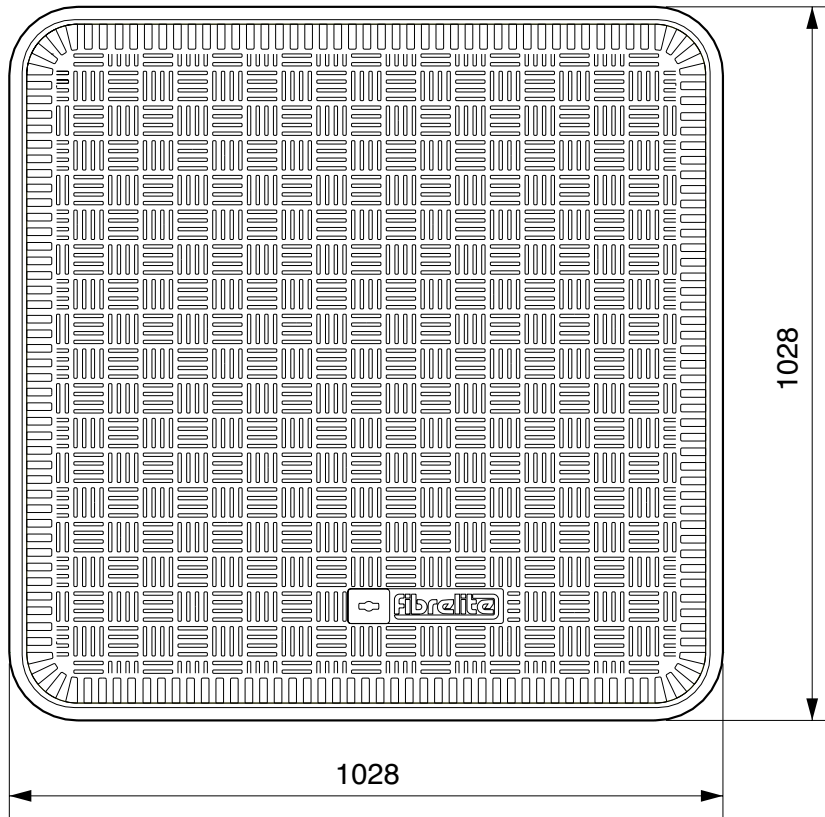

Load Rating	Cover Weight	Frame Weight
A15	23 kg	16 kg
B125	28 kg	16 kg
C250	46 kg	16 kg
D400	65 kg	16 kg
E600	66 kg	16 kg
F900	86 kg	16 kg

900mm square flat sealed composite cover with an aluminum frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



**CONCRETE**



**VERY IMPORTANT**

OUTER EDGE "A" OF FRAME SET 5MM ABOVE GENERAL FORECOURT AREA WITH CONCRETE RAMPED AWAY OVER 300MM


**VERY IMPORTANT**

The underside of the frame must be adequately supported by concrete.

Expansion joint filled with petrol resistant mastic.

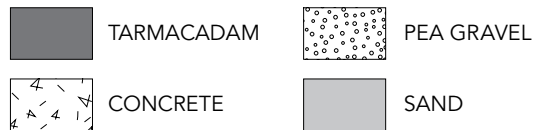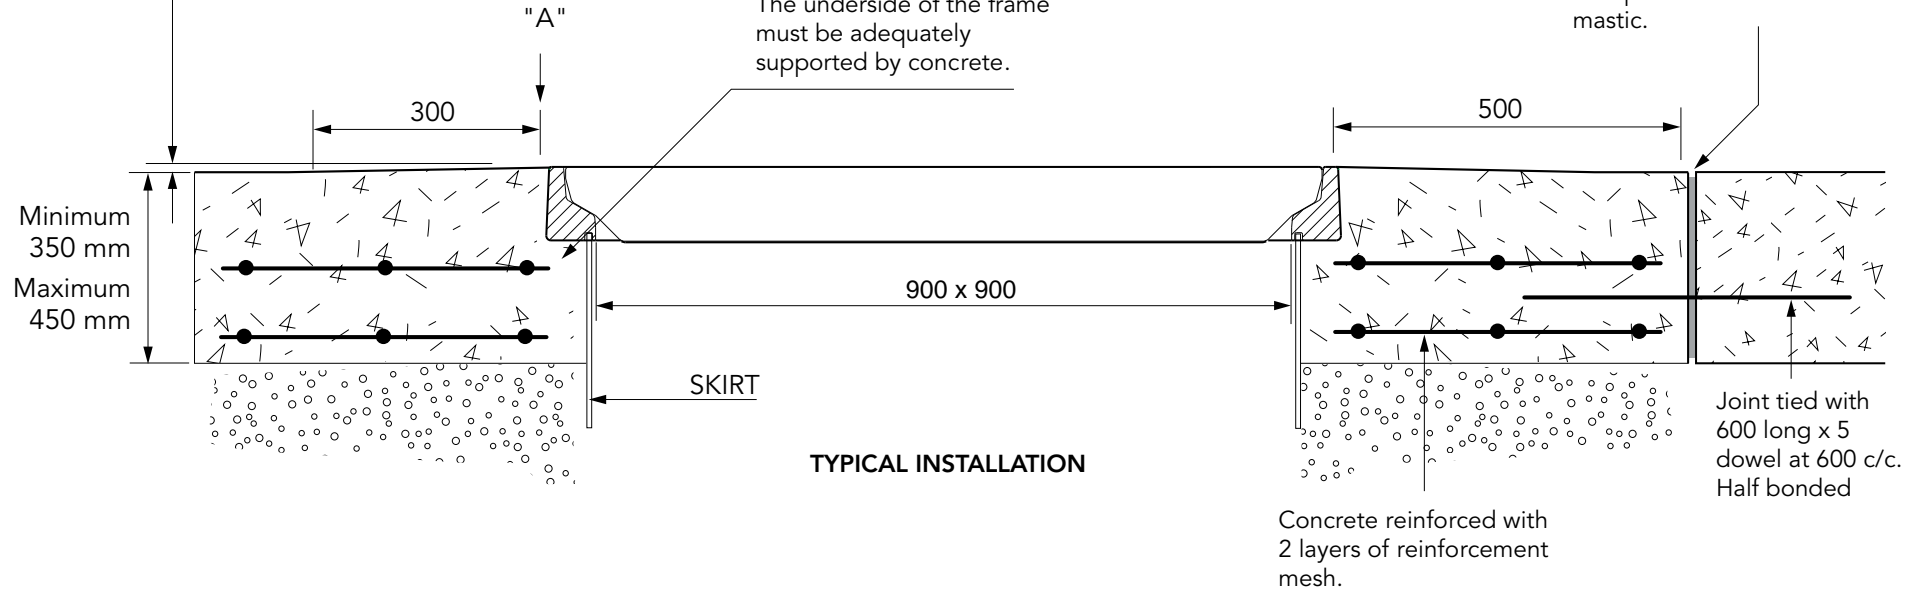

**TARMACADAM**

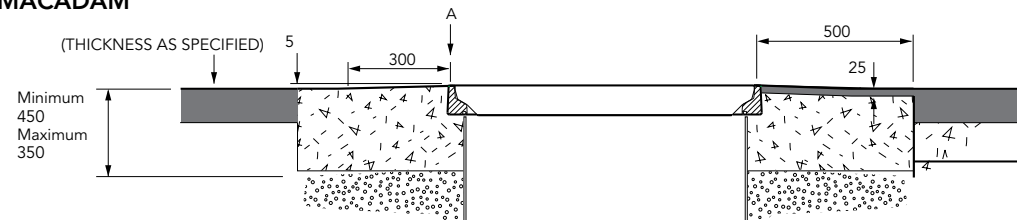

900mm square flat sealed composite cover with an aluminum frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

